


# 4-WAY BONNET POD ADJUSTMENT SETTINGS



## ALSO AVAILABLE

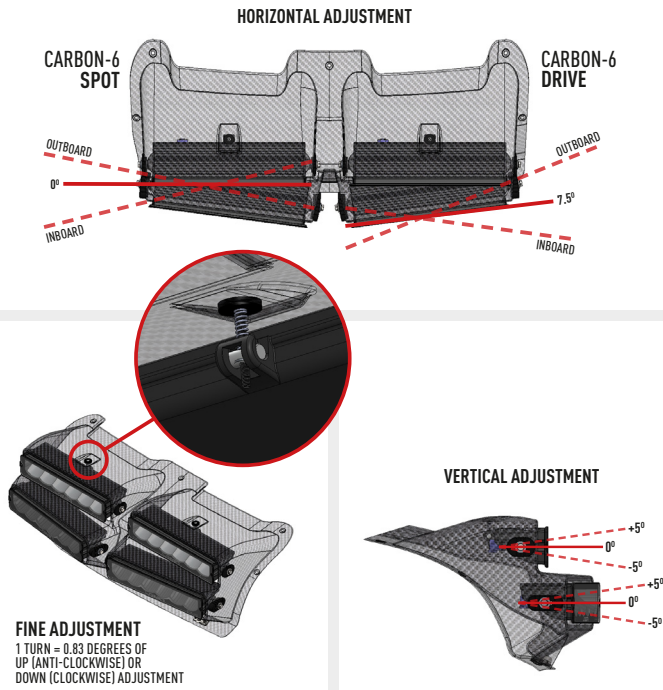

AMBER AND BLACK LENS COVERS (INCLUDED WITH LAMP)



WIRING KITS



MOUNTING KITS

**LAZER**  
HIGH PERFORMANCE LIGHTING

## CARBON-6 INSTRUCTIONS

Thank you for your purchase of the 3rd Generation of Carbon-6 High Performance LED Driving Lights. Along with all the team at Lazer, I hope you're delighted with the performance and build quality of your new lights, and they deliver a safer and faster night driving experience. As always we value your feedback and would welcome you to leave a review on our website.

*B. Russell-Smith*

Ben Russell-Smith (Director - Lazer Lamps)

**LAZER**  
HIGH PERFORMANCE LIGHTING

[WWW.LAZERLAMPS.COM](http://WWW.LAZERLAMPS.COM)

T +44 (0) 1992 677374

E [sales@lazerlamps.com](mailto:sales@lazerlamps.com)


Lazer Lamps Ltd, Units 1-2, Harlow Mill Business Centre  
Riverway, Harlow, Essex CM20 2FD, United Kingdom

**MADE IN THE UK** /LAZERLAMPS

# ELECTRICAL CONNECTION

# LAMP MODES (CARBON-6 GEN3)

## CARBON-6 (GEN3) CONNECTOR

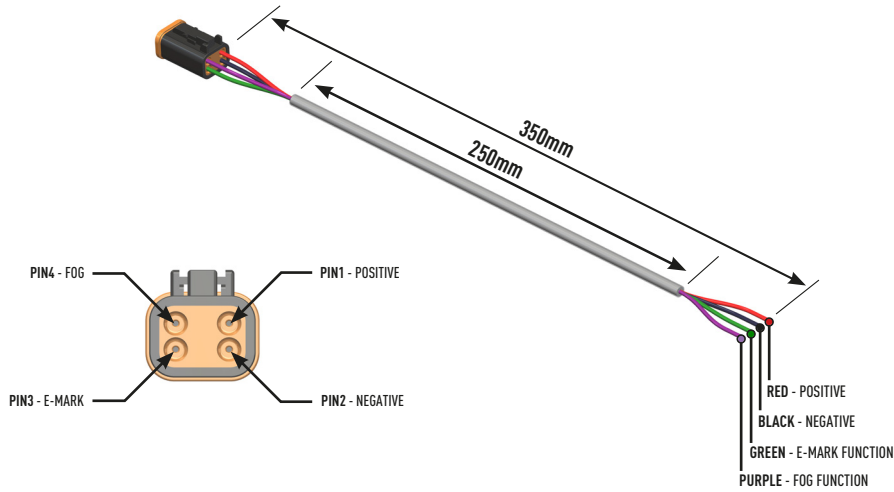


## TWO-LAMP HARNESS KIT FOR CARBON-6 (GEN3)

### ADD OPTIONAL MOMENTARY SWITCH - PIN4 - FOG MODE

If the hold time for the switch is  $\leq 750\text{ms}$  then the beam pattern changes from **default** mode to **fog** mode and is retained after the switch is released.

If the hold time for the switch is  $\geq 750\text{ms}$  then the beam pattern changes from **default** to **fog** but, the mode will not be retained after the switch is released and it will revert to the previous state (default).

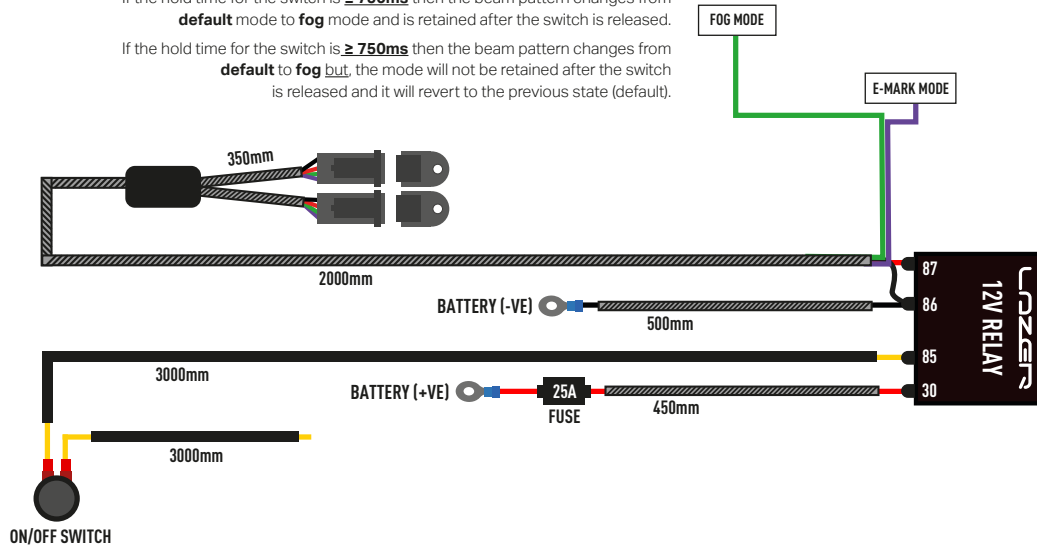

LAMP MODE	INPUT SIGNAL		BEAM PATTERNS		CURRENT @ 13.5V (A)
	GREEN WIRE (E-MARK) CONNECTOR PIN 3	PURPLE WIRE (FOG) CONNECTOR PIN 4	HIGH BEAM % LUMEN OUTPUT	FOG BEAM % LUMEN OUTPUT	
E-BOOST	0V	0V	100	0	6.5
E-MARK	12V	0V	25	0	1.625
FOG	0V	12V	0	100	6.5
RAIN	12V	12V	0	25	1.625

## PWM INFORMATION (CARBON-6 GEN3)

Some race teams may wish to activate the different modes of these lamps by using a PWM signal. PIN 3 is PWM capable, so race teams should use a 100Hz PWM frequency, in order to obtain different beam patterns. See table.

PWM SIGNAL REQUIREMENTS	
PWM SIGNAL FREQUENCY	100 Hz
TOLERANCE DUTY CYCLE	$\pm 2\%$

AVAILABLE PWM MODES	INPUT SIGNAL		LIGHT OUTPUT		CURRENT @ 13.5V (A)
	12V PWM SIGNAL ON PIN 3 (E-MARK PIN) DUTY CYCLE %	VOLTAGE ON PIN 4 (FOG PIN)	PRIMARY BEAM % LUMEN OUTPUT	SECONDARY BEAM % LUMEN OUTPUT	
0	0V	100	0	6.5	
10	0V	90	0	1.6	
18	0V	80	0	2.6	
26	0V	70	0	3.6	
34	0V	70	30	4.6	
42	0V	70	40	7.2	
50	0V	60	60	9.1	
58	0V	40	70	9.1	
66	0V	30	70	9.1	
74	0V	0	80	9.1	
82	0V	0	90	9.1	
90	0V	0	100	8.1	
100	0V	25	0	1.6	
0	12V	0	100	6.5	
10	12V	0	95	6.2	
18	12V	0	90	5.9	
26	12V	0	85	5.5	
34	12V	0	80	5.2	
42	12V	0	75	4.9	
50	12V	0	70	4.6	
58	12V	0	65	4.2	
66	12V	0	60	3.9	
74	12V	0	55	3.6	
82	12V	0	50	3.3	
90	12V	0	45	2.9	
100	12V	0	25	1.6	