

# LINEAR-18 ELITE

Measuring just 40mm in height, the Linear range represents the very best in slimline auxiliary high beam driving lights. By utilising a combination of highly efficient 3W LEDs and vacuum-metallised wide optics, to deliver a perfectly tuned beam pattern for everyday road use, the 18 Elite boasts 13,500 raw lumens, with 1 lux reaching just over 500m with a 64 degrees spread of light. Dual-output functionality allows for the UNECE reference number to be reduced, in markets requiring a low E-mark reference number, made possible through addition of the Linear E-Mark Cap (sold separately).



SEE MORE. **GO FASTER.** GO SAFER.

## LINEAR-18 ELITE

- Combination of highly efficient 3W 'premium bin' LEDs
- Vacuum-metallised optics deliver wide spread of light
- Flexible mounting options – Anti-heft mounting brackets included
- Lower E-Mark available via a E-Mark cap
- Sleek, low profile design facilitates installation
- Electronic thermal management
- Designed & manufactured in the UK


### MOUNTING OPTIONS



(Anti-theft fasteners included)



(Centre Mount kit sold separately)

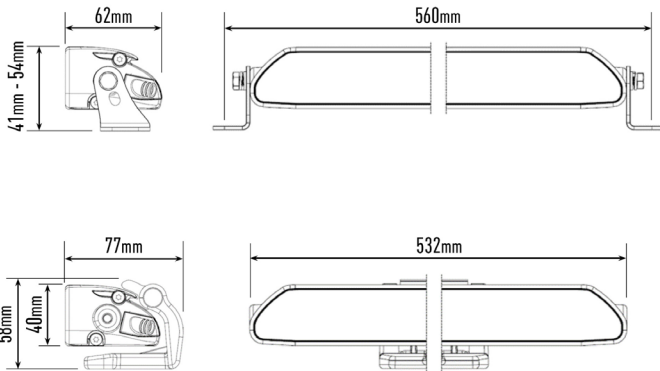

<b>E-MARK REF</b> (W/O E-MARK CAP   WITH E-MARK CAP)	2x25   2x10
<b>VOLTAGE RANGE</b>	10V - 32V
<b>RAW LUMENS</b> (W/O E-MARK CAP   WITH E-MARK CAP)	13,500   5,225
<b>BEAM PATTERN</b>	Wide
<b>BEAM DISTANCE (0.25LX)</b> (W/O E-MARK CAP   WITH E-MARK CAP)	1023m   647m
<b># HIGH POWER LEDs</b>	36
<b>POWER CONSUMPTION</b> (W/O E-MARK CAP   WITH E-MARK CAP)	130W   25W
<b>CURRENT DRAW†</b> (W/O E-MARK CAP   WITH E-MARK CAP)	9A   1.8A
<b>LED LIFE</b>	50,000 Hrs*
<b>WEIGHT</b>	1090g



**E9**

APPROVED HEADLIGHT

---






**IP68**  
WATERPROOF

---

**5** YEAR  
WARRANTY

\* LED Manufacturers Specifications  
†At 14.4 Volts

Horizontal: 64° / Vertical: 15° (2% of peak)

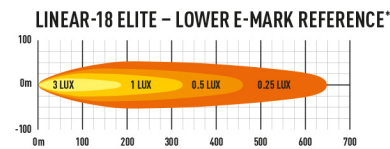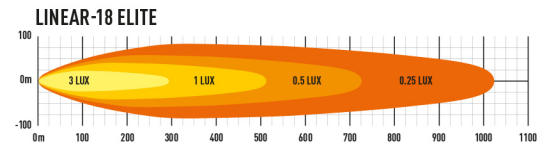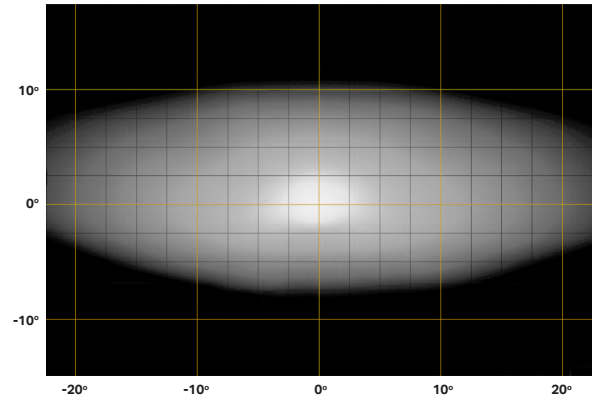

\*Requires Linear E-Mark Cap (sold separately)

LAZER LAMPS LTD, Units 1+2, Harlow Mill Business Centre, Riverway, Harlow, Essex. CM20 2FD. UK  
+44(0)1992 677374 | sales@lazerlamps.com | www.lazerlamps.com

