

TOYOTA 4RUNNER (2014-2019) GRILLE KIT INSTRUCTIONS



+1 520 468 2633 sales@triple-r-lights.com 600 North Bullard Avenue, Suite 6, Goodyear AZ 85338, UNITED STATES

WWW.TRIPLE-R-LIGHTS.COM

WHAT'S INCLUDED

- 4x Grille Mounting Brackets
- Anti-Theft Fasteners & Key
- Fitting Instructions

Additionally - Kit Includes:

- 2x Linear-6 LED Lightbar
- 1x Two-Lamp Wiring Kit

TOOLS REQUIRED



STEP 1 Cut and remove the entire mesh part away from the exterior shell of the grille.
STEP 2 File down all rough edges smooth. NOTE: There may be some additional trimming on the inside of the outer back
STEP 3 Trim as needed until brackets fit and clip on the back side securely.





STEP 4

Once you verify brackets fit correctly install brackets to the lamps.

Torque Value (code inside brackets): RHIB/LHIB - 8 Nm RHOB/LBOB - 3 Nm

Please use a thread seal compound (i.e. Loctite 222) to protect the lamp fastener from binding over time.



STEP 5

Install the lamps into the grille, making sure they clip in place.





Drill pilot hole for screws.

STEP 6




STEP 7

Tighten screws into grill but be careful not to overtighten and strip the plastic out.



ELECTRICAL CONNECTION

Please disconnect the vehicle battery before installing or servicing your LED light installation. If in doubt, it is recommended to use the services of a professional installer. It is recommended to use the available corresponding Triple-R wiring kit for your product. If utilizing existing (non Triple-R) wiring, make sure to use the appropriate wire gauge and fusing in line with your lights.

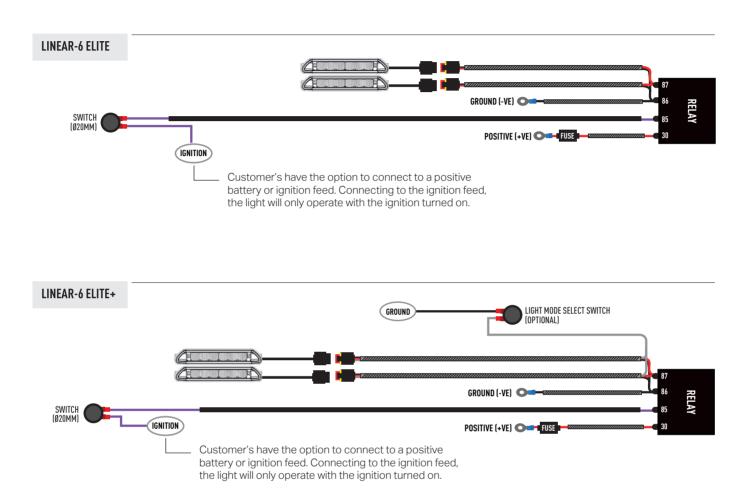

MODE SWITCH (SOLD SEPERATELY)



PIN NO.	CONNECTION	FUNCTION
PIN 2	LAMP - SIGNAL	Mode select / Connecting to lamp signal to V- GND
PIN 3	BATTERY - V- GROUND	Mode select / Connecting to lamp signal to V- GND
PIN 8	NOT USED	N/A
PIN 6	BATTERY - V+ POSITIVE	For LED writing on the switch.
PIN 7	BATTERY - V- GROUND	For LED writing on the switch.

